


CAM 球形氧化铝


CAM Spherical Alumina



应用范围广Wideapplicationrange
导热性能极佳Excellentthermalconductivity
易于加工Easytoprocess

SPA-10

球形氧化铝
Spherical Alumina

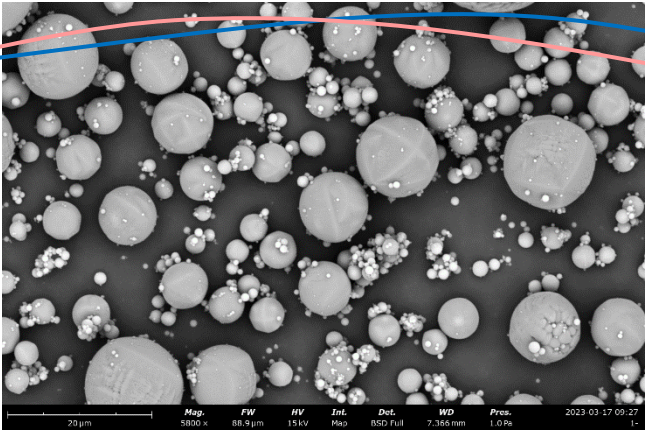

项目 Items	测试标准 Test Standards	国际单位 Units	典型值 Typical Values
常规特性 General Properties			
白度 Whiteness	YS/T 469	-	91.7
真密度 True Density	ISO 21687	g/cm ³	3.70
粒度 ParticleSize (D50)	GB/T 19077	µm	12.10
比表面积 S.S.A.	GB/T 6609.35	m ² /g	0.39212
含水量 Moisture	GB/T 6284	%	0.08
化学成分Chemical			
Al ₂ O ₃	ICP	%	≥99.8
Fe ₂ O ₃	ICP	%	≤0.05
SiO ₂	ICP	%	≤0.05
Na ₂ O	ICP	%	≤0.30

注：典型值是指实验测试平均数据，仅用于使用时的参考，不作为产品的标准。
Remark: The typical value refers to the average data of the experimental test, which is only used for reference in use, not as a product standard

贮存条件 Storage conditions
储存于阴凉、通风处；远离热源、火种；避免阳光直射；避免淋雨。
Store in a cool, ventilated place; Keep away from heat sources and fires; Avoid direct sunlight; Avoid rain.
若拆包未使用完，请重新封口，避免粉体吸潮，影响使用。
If the unpacking is not used, please re-seal it to avoid moisture absorption by the powder and affect the use.
贮存期：3年。
Shelf life: 3 years.

包装规格 Packing specifications
25kg/包。
25 kg/bag.

CMP Advanced Materials Co., Ltd No.66 TaiShan Road, Tanggu, BinHai New Area, Tianjin, China

电话/TEL: 86 22 23210158 传真/FAX: 86 22 231330856